

SR-8-2 ACOUSTIC SYSTEM



KELONIK CINEMA SOUND

Surround channel cinema sound system for background music in Halls

SR-8-2 system is a high fidelity background two-way sound speaker using coaxial speaker technology enclosed in a high-pressure polypropylene injection cabinet.


SR-8-2 system's cabinet has a high frequency driver with 1" Ø dome, and one 8" Ø woofer.

Crossover is passive-type, with 2,500 Hz cut frequency.






SR-8-2 ACOUSTIC SYSTEM

Adjustable mount AX-8-2



Mount SP SR-8-2

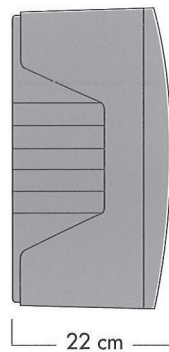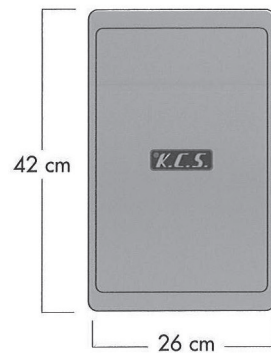

TECHNICAL DATA

Frequency Range (-10 dB)	40 Hz- 20 kHz
Nominal Impedance	8 Ω

POWER CAPACITY

Continuous Pink Noise ⁽¹⁾	100 W
Continuous Program	200 W
Sensitivity 1W/1m	90 dB S.P.L.
Crossover Frequency	2500 Hz
Horizontal Beamwidth	100°
Vertical Beamwidth	100°
Dimensions (H x W x D)	42 x 26 x 22 cm
Net Weight	8 kg

(1) Based on a 2 hour test using a continuous 6 dB crest factor pink noise signal band limited according to IEC 268-1 (1985).

COMPONENTS

Cabinet	SR-8-2
Low Frequency Driver	G-8K
Passive Crossover	F-Factor-8
High Frequency Tweeter	TWT-8K